


RF Coaxial Test Sockets [ESD measure]

Concept of this product is:
Giga-bit transmission available
IC test socket considering ESD measure.
Especially, this product is designed to demonstrate excellent performance in high frequency to the utmost taking into consideration of ESD measure.

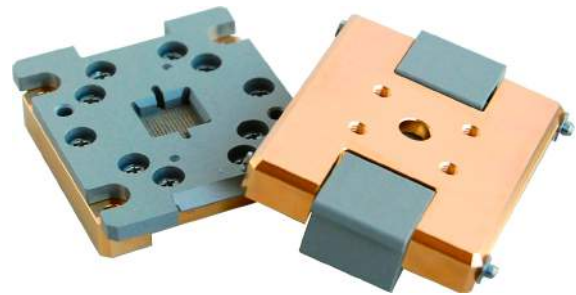


Specification


Impedance : 50Ω
S11 : -10dB : 22.5GHz
S21 : -1dB : 22.5GHz
Mutual Capacitance : 0.57pF
Self Inductance : 1.0nH
Rise Time : 99.1ps : 3.35Gbps
Jitter RMS : 5.61ps : 3.35Gbps
Pitch : 0.5mm~
Probe Pin Type : RF/POWER/GROUND

High frequency characteristic

Return loss

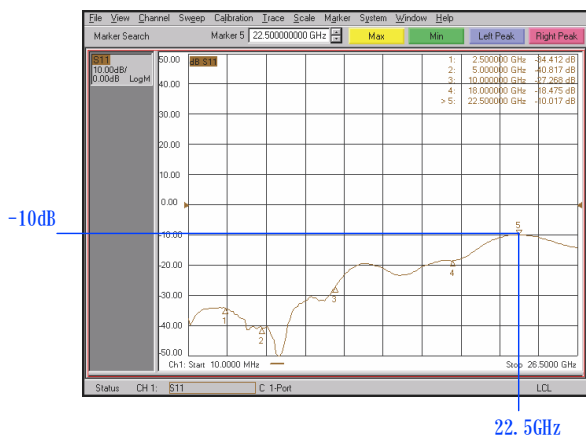

Insertion loss

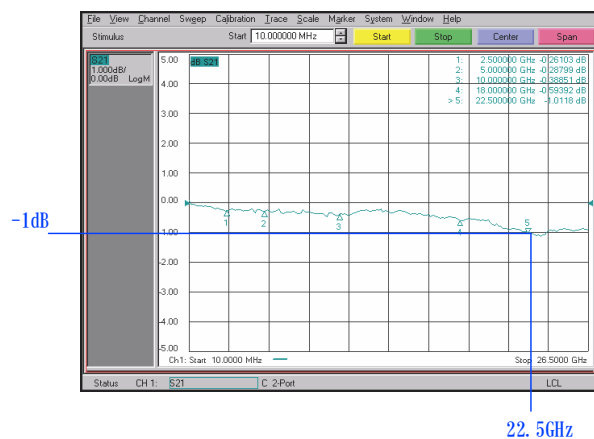

Eye Pattern

