


## Plug Socket UJP2 Series

- Highly reliable beryllium copper spring louver
- Low and stable contact resistance by multi contact configuration
- Long durability



### UJP2AG


φ 2.0 hole Socket



current rating : 18A  
(CP-MALE1-1.3X8.0L)

### UJP2BG


φ 2.0 hole Socket



current rating : 18A  
(CP-MALE1-1.3X8.0L)

### UJP2TG


φ 2.0 hole Socket

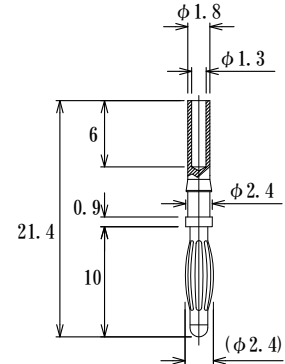

current rating : 18A  
(CP-MALE1-1.3X8.0L)

### UJP25AG


φ 2.5 hole Socket



current rating : 18A  
(CP-MALE30-8L-2)

### UJP25AN-PE


φ 2.5 hole Socket



current rating : 18A  
(CP-MALE30-8L-2)

### UJP2AG-234L-DAI


φ 2.0 hole socket




current rating : 18A  
(CP-MALE1-1.3X8.0L)

### UJS2AG

φ 2.0 hole socket



※Suggested torque : 0.784 (N m)

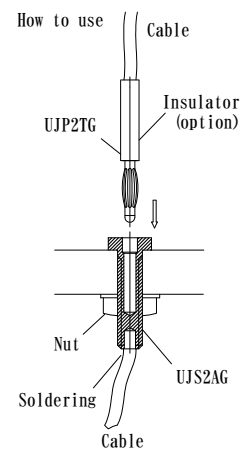


## Color Plug Sockets for $\phi 2.0$ Hole

Maximum current value : 10A  
Operating Temperature :  $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$


How to order  
**UJPS2-1011-1-RED**

BLK  
RED  
BLU  
YLW  
GRN  
WHT

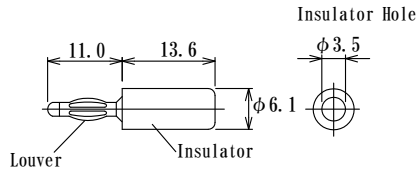


## Plug Sockets UJP4 Series

- Highly reliable beryllium copper spring louver
- Low and stable contact resistance by multi contact configuration
- Long durability

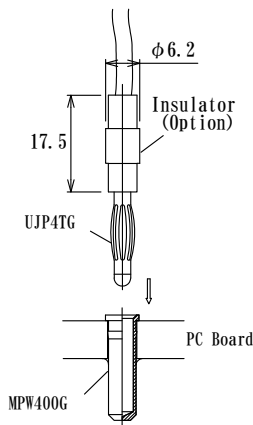

### MPW400G


Socket pin  
Straight hole



Brass  
Gold plating over Ni

### UJP4TG


$\phi 4.0$  Applicable hole



current rating : 30A  
(CP-MALE2-14L-T015)

### UJP4AG


$\phi 4.0$  Applicable hole



current rating : 30A  
(CP-MALE2-14L-T015)

### UJP4K400G

$\phi 4.0$  Applicable hole



current rating : 30A  
(CP-MALE2-14L-T025)