

### 3 Pole Connector


AC7.5KV

#### Specification

Current rating: 1.5A  
Dielectric Strength: AC15KV 1 minute at sea level  
Insulation Resistance: DC1000V 100MΩ min  
Contact Resistance: 15mΩ max  
Temperature range: -10°C~+80°C

#### Material

Insulator : Unilate, glass filled, Black  
Plug pin : Brass, Gold plating over Ni Plating  
Socket pin: Beryllium Copper, Heat treated  
Gold Plated over Nickel plating  
Sleeve: Brass, Gold Plating over Ni plating

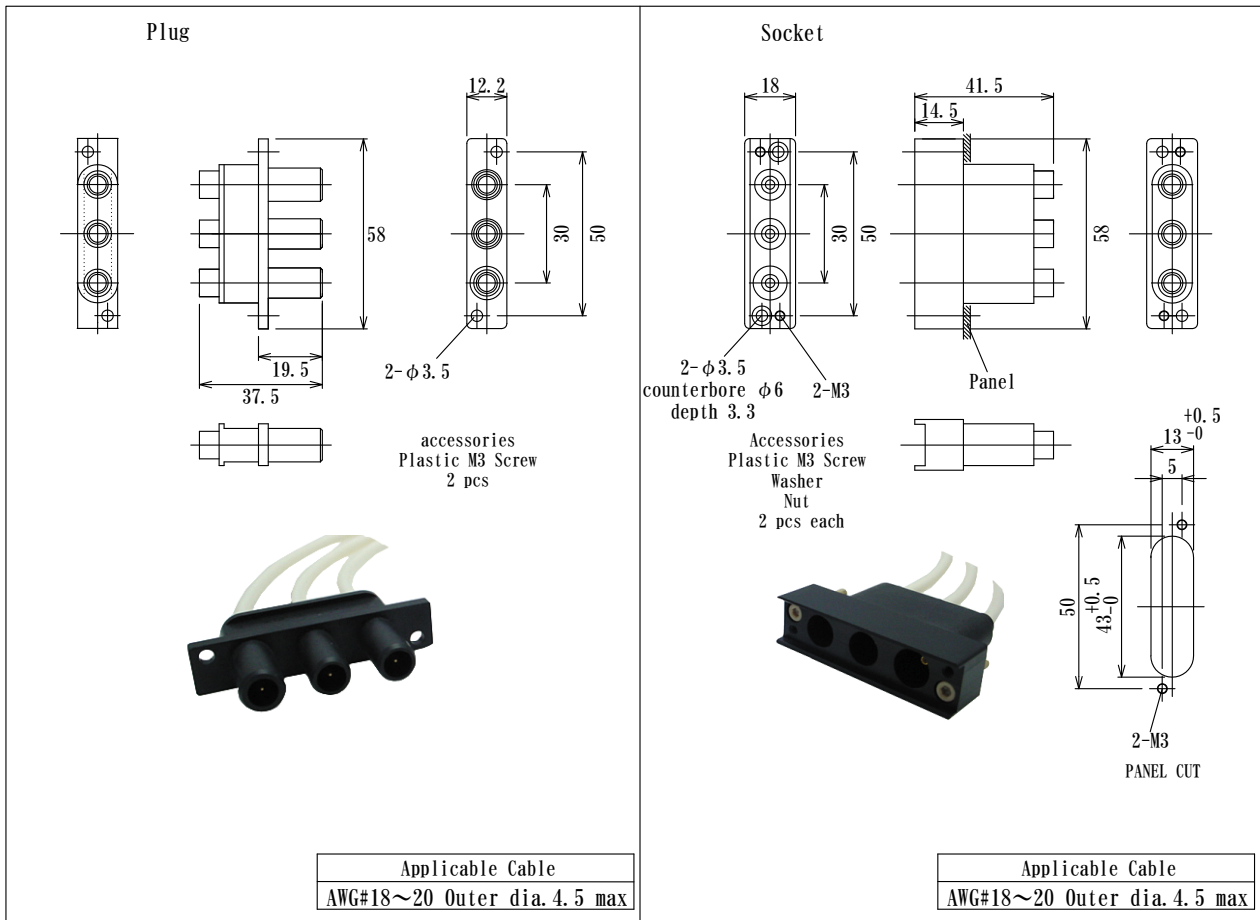

mm


#### How to order

**HAY-S-3P-15** - □□□□

Length mm

Connector P/N

**Plug : HAY-P-3P-15**  
**Socket : HAY-S-3P-15**

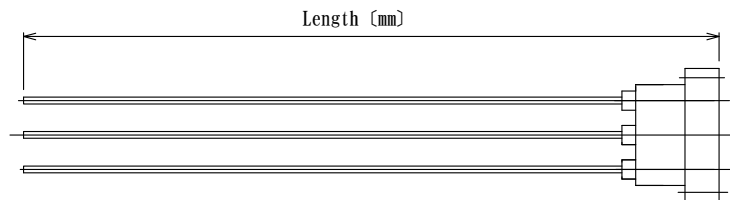

### 3 Pole Connector

Voltage rating AC7.5KV

\* machined housing


\* Please contact us if you need customization in terms.

#### Specification

Current rating: 1.5A  
Dielectric Strength: AC15KV 1 minute at sea level  
Insulation Resistance: DC1000V 100MΩ min  
Contact Resistance: 15mΩ max  
Temperature range: -10°C ~ +80°C

#### Material

Insulator: Unilate, glass filled, Black  
Plug pin: Brass, Gold plating over Ni Plating  
Socket pin: Beryllium Copper, Heat treated  
Gold Plated over Ni plating  
Sleeve: Brass, Gold Plating over Ni plating

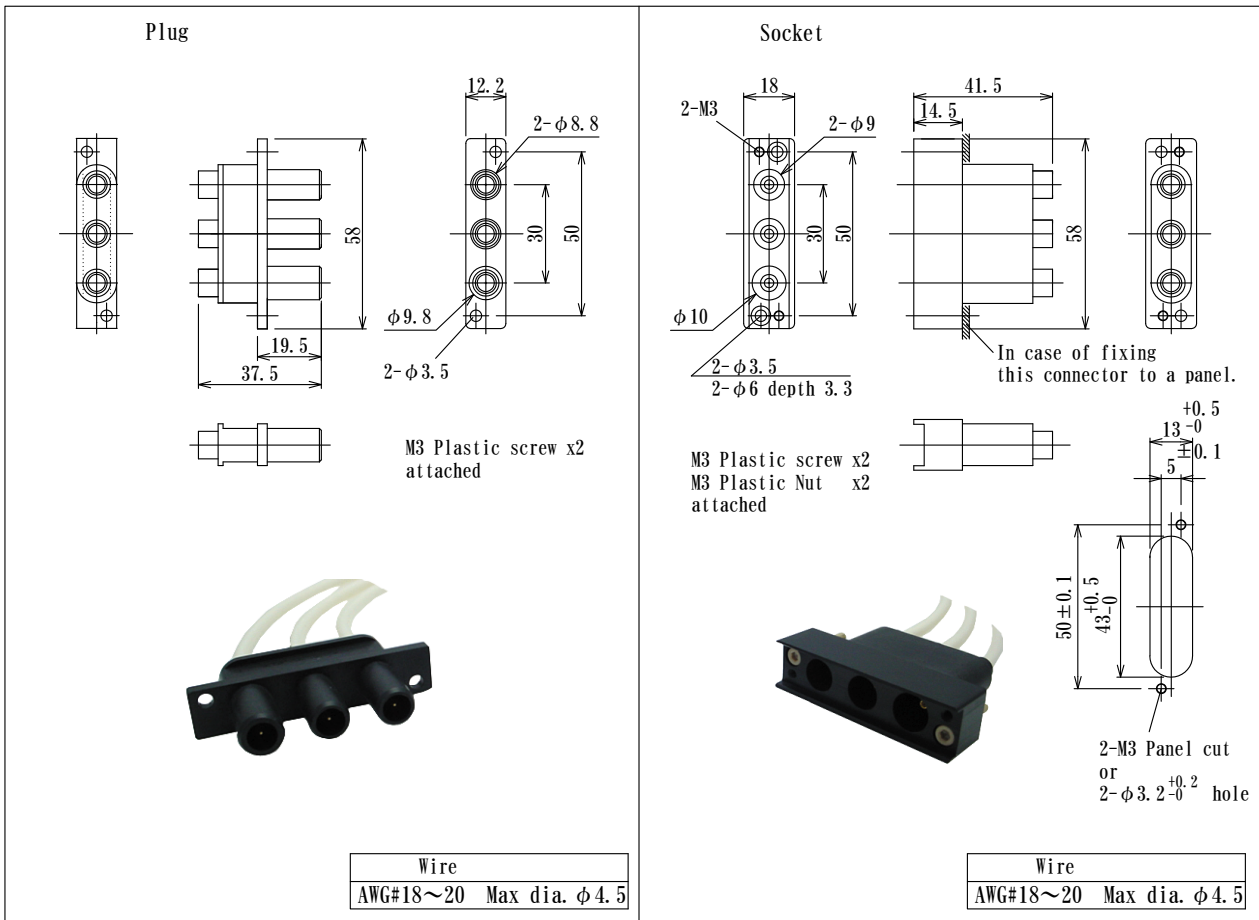


#### How to order

Please order as cable assemblies.

HAY-S-3P-15 - □□□□

Length [mm]

Plug : HAY-P-3P-15  
Socket : HAY-S-3P-15

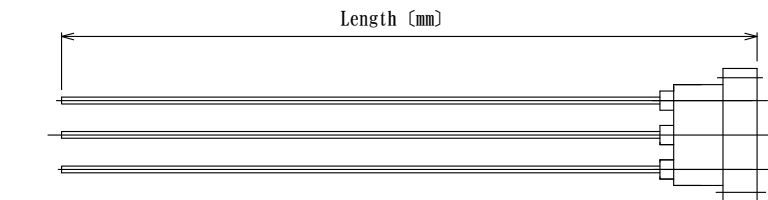

#### Figure of mating

