
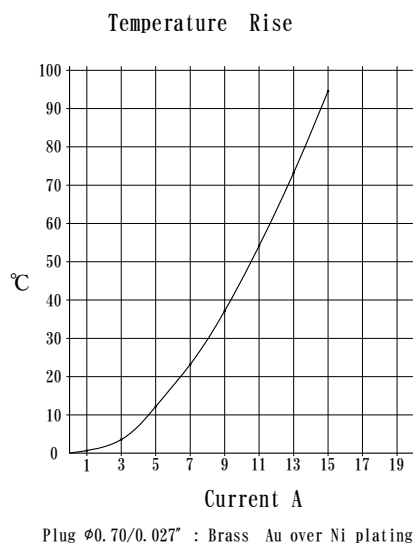


Socket Pin Technical Data (reference only)

It is not a guaranteed value.



Acceptable Plug $\phi 0.60 \sim \phi 0.75$ ($\phi 0.024'' \sim \phi 0.029''$)

Fig. 1

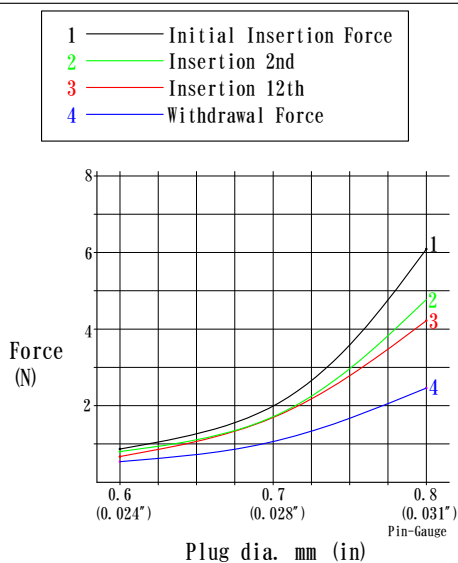



Acceptable Plug $\phi 0.76 \sim \phi 0.85$ ($\phi 0.030'' \sim \phi 0.033''$)

Fig. 2

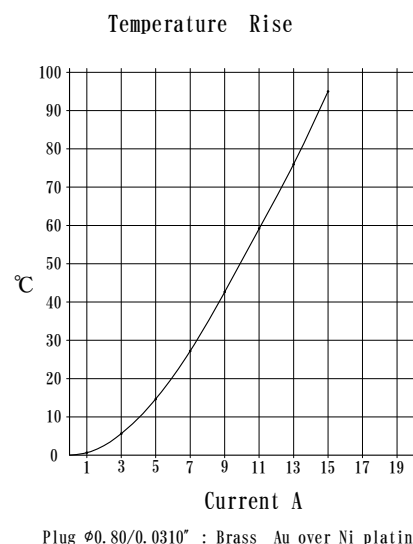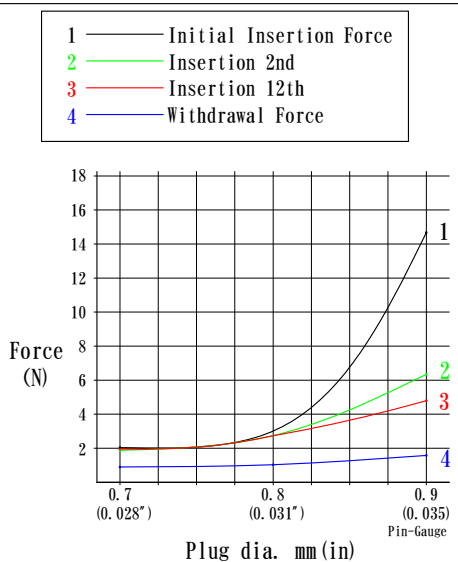

Acceptable Plug $\phi 0.70 \sim \phi 1.05$ ($\phi 0.028'' \sim \phi 0.041''$)

Fig. 3

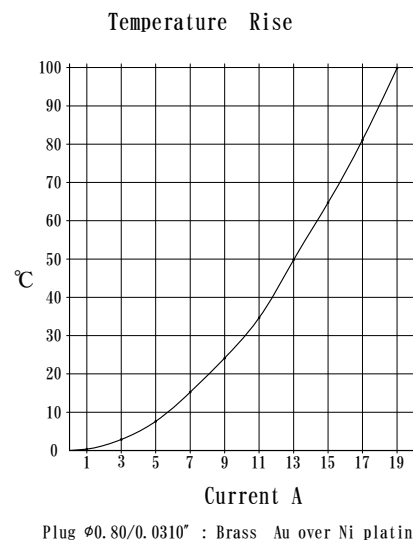
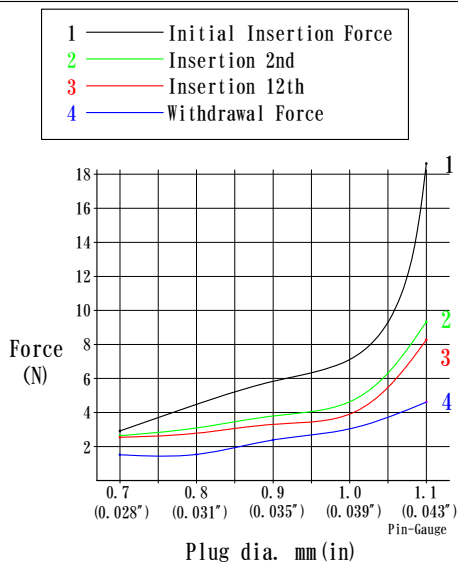


Socket Pin Technical Data (reference only)

It is not a guaranteed value.

Acceptable Plug $\phi 0.70 \sim \phi 1.05$ ($\phi 0.028'' \sim \phi 0.041''$)



Fig. 4

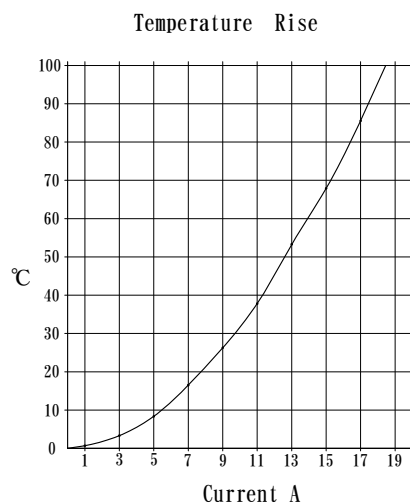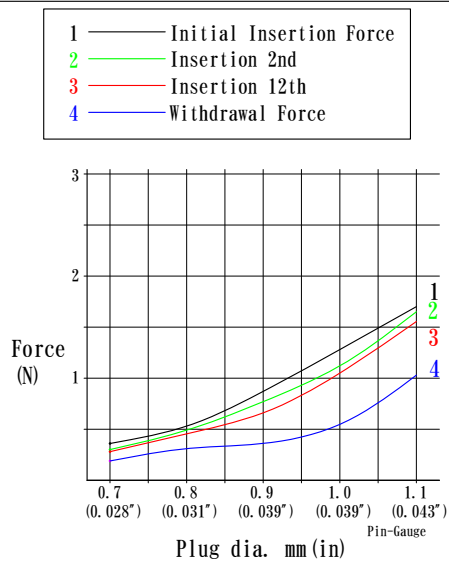

Plug $\phi 0.90/0.035''$: Brass Au over Ni plating

Acceptable Plug $\phi 0.90 \sim \phi 1.10$ ($\phi 0.035'' \sim \phi 0.043''$)

Fig. 5

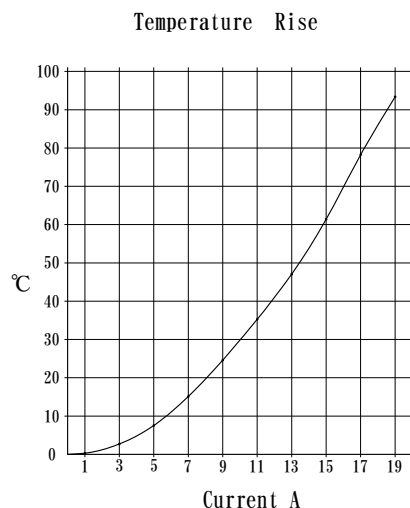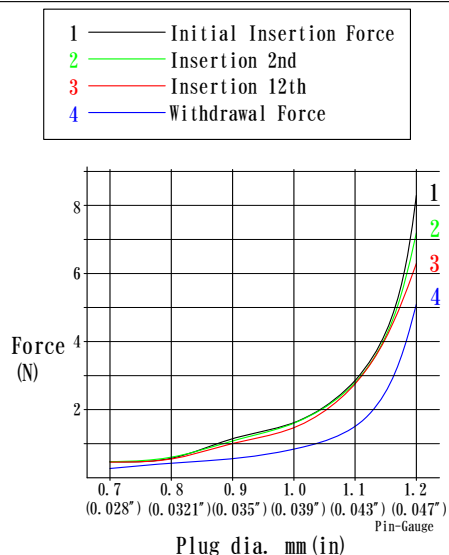

Plug $\phi 1.0/0.039''$: Brass Au over Ni plating

Note:

1. Current rating value is in case of a single pole.
When using multi number of pins, the current rating decreases.
2. In case of rectangular section stamping pin, these data shall be changed depending on its size and edge conditions.