



Spring Probe, 8YS series

- [Feature] ·High Durability
·High Contact Reliability
·Narrow Pitch type available

The socket fixed method

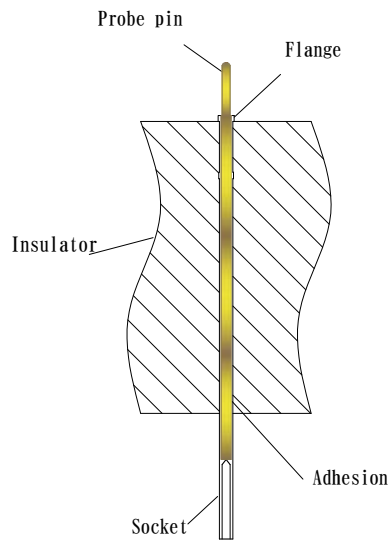


8YSN058 type




Preload ——— 0.20N (20gf)
2 / 3 travel ——— 0.44N (45gf)
Full travel ——— 0.59N (60gf)

8YSN058-1	8YSN058-2	8YSN058-3	8YSN058-5	8YSN058-5Y
Spherical	Conical	Flat	Crown	Reduced Crown
Material:BeCu Finish:Rh plated	Material:BeCu Finish:Rh plated	Material:BeCu Finish:Rh plated	Material:BeCu Finish:Rh plated	Material:SK Finish:Rh plated


Acceptable Sockets 8YSN058R-F

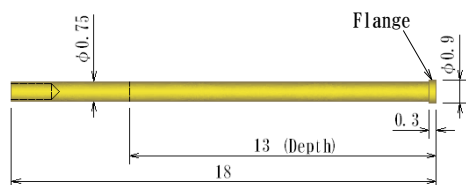

8YSN058R-ST

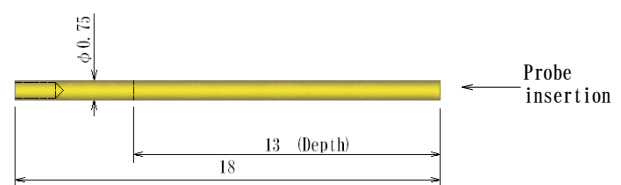



8YSF048 type




Preload ——— 0.15N (15gf)
2 / 3 travel ——— 0.44N (45gf)
Full travel ——— 0.59N (60gf)

<p>8YSF048-1</p>	<p>8YSF048-2</p>	<p>8YSF048-3</p>	<p>8YSF048-5</p>	<p>8YSF048-5F</p>
-------------------------	-------------------------	-------------------------	-------------------------	--------------------------

Acceptable Sockets

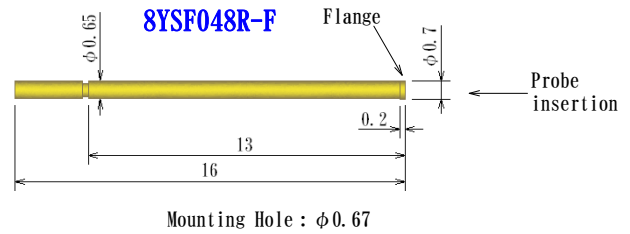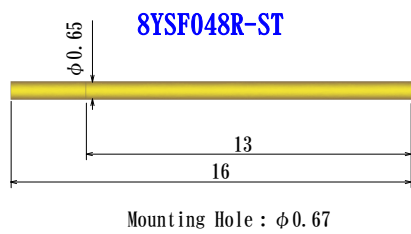



8YSJ038 type




Preload ——— 0.20N (20gf)
2 / 3 travel ——— 0.44N (45gf)
Full travel ——— 0.59N (60gf)

<p>8YSJ038-1</p> <p>Spherical Material:BeCu Finish:Au plated</p>	<p>8YSJ038-2</p> <p>Conical Material:BeCu Finish:Au plated</p>	<p>8YSJ038-3</p> <p>Flat Material:BeCu Finish:Au plated</p>	<p>8YSJ038-5</p> <p>Crown Material:BeCu Finish:Au plated</p>	<p>8YSJ038-5F</p> <p>Reduced Crown Material:SK Finish:Au plated</p>
---	---	--	---	--

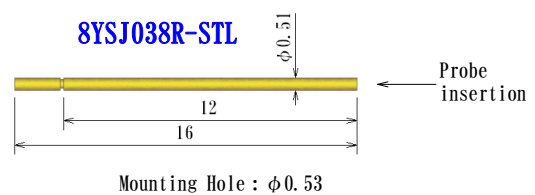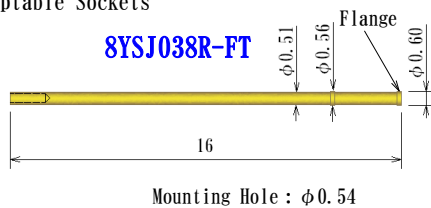



Acceptable Sockets



8YSB031 type




Preload ——— 0.13N (13gf)
2/3 travel — 0.30N (31gf)
Full travel — 0.39N (40gf)


 Spherical Material:BeCu Finish:Au plated	 8YSB031-2 Conical Material:BeCu Finish:Au plated	 8YSB031-3 Flat Material:BeCu Finish:Au plated	 8YSB031-5F Reduced Crown Material:SK Finish:Au plated
--	--	--	---

Acceptable Sockets

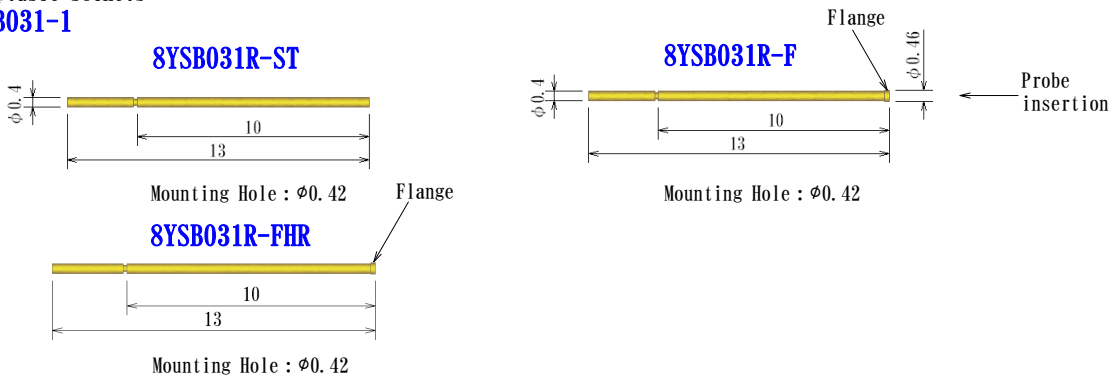


8YSB031-1



8YSQ025 type




Preload ——— 0.05N (5gf)
1/2travel — 0.18N (18gf)
Full travel — 0.29N (30gf)


 Spherical Material:SK Finish:Au plated	 8YSQ025-2 Conical Material:SK Finish:Au plated	 8YSQ025-3 Flat Material:SK Finish:Au plated
--	--	--

Acceptable Sockets

8YSQ025-1

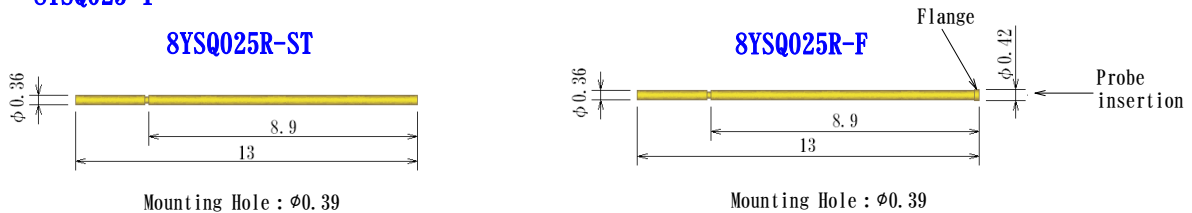


8YSV type

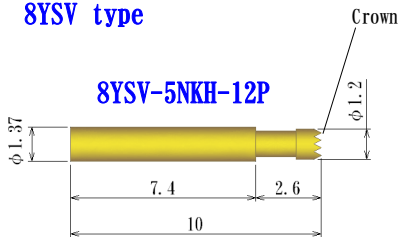


Preload ——— 0.118N (12gf)
1.1mm travel — 0.696N (71gf)
Full travel — 1.6mm

JR20 type

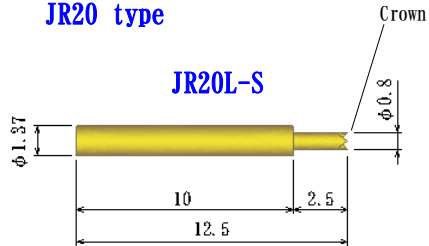

Preload ——— 0.069N (7gf)
1.5mm travel — 0.39N (40gf)
Full travel — 2.5mm

8YSVR-NKH-LP22

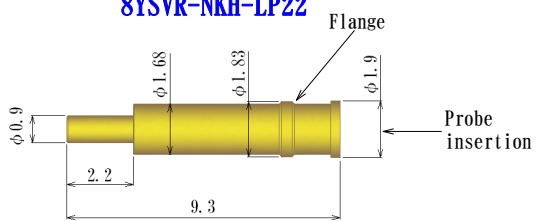

JR20W-S

