

8Y254 Series Target Connectors for Spring Probe

2.54mm pitch

Specifications

Dielectric strength : AC200Vrms 1minute
Insulation resistance : 1000MΩmin
Capacitance : 1pF max
Operating temperature : -45°C~+150°C

Materials

Insulator : High temp. thermoplastic
Body : Brass, Au plating over Ni


How to order

8Y254 - TG SM - 04 S

SM: Surface mount
SD: Solder dip

S : Single in line
D : Dual in line
Number of positions : P
Single in line : 02, 03, 04, 06, 07, 08, 09, 10, 12
Dual in line : 04, 12, 20(even number)

Regarding other number of positions, please feel free to ask us.




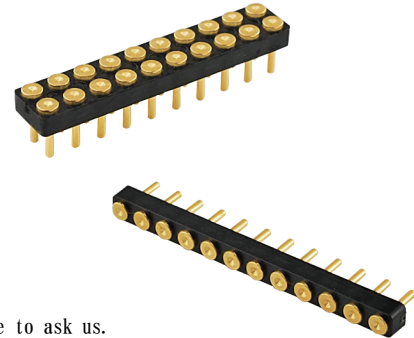


SM : Surface Mount

S : Single In Line

SM : Surface Mount

D : Dual In Line


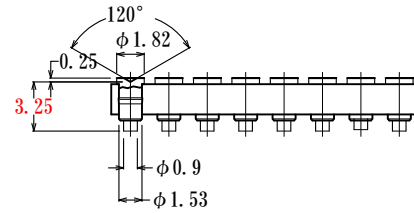

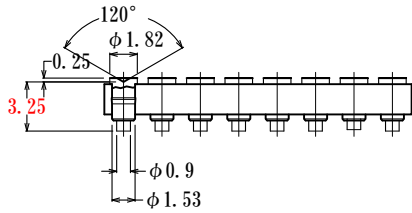


SD : Solder dip

S : Single In Line


SD : Solder dip

D : Dual In Line

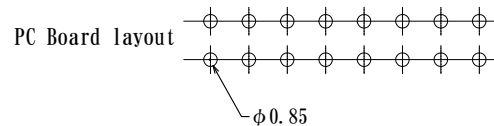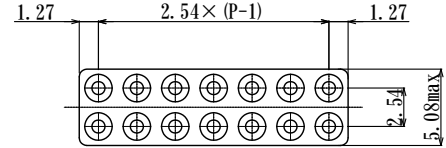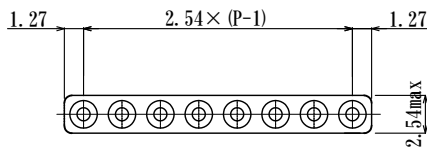

8Y254 Series Target Connectors for Spring Probe


2.54mm pitch

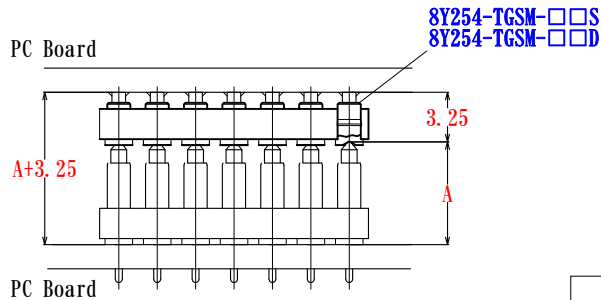

SM: The distance between the substrates in the case of SMT type.

:mm

Spring Probe Connectors		Initial height	S	Full Travel	Line	A+3.25
SMT type P/N	Solder Dip type P/N					
8Y254-53S10SM-□□S	8Y254-53S10SD-□□S	5.3	0.7	1.0	Single	8.55
8Y254-53S10SM-□□D	8Y254-53S10SD-□□D				Dual	
8Y254-64S14SM-□□S	8Y254-64S14SD-□□S	6.4	1.0	1.3	Single	9.65
8Y254-64S14SM-□□D	8Y254-64S14SD-□□D				Dual	
8Y254-74S14SM-□□S	8Y254-74S14SD-□□S	7.4	1.0	1.4	Single	10.65
8Y254-74S14SM-□□D	8Y254-74S14SD-□□D				Dual	
8Y254-81S17SM-□□S	8Y254-81S17SD-□□S	8.1	1.1	1.7	Single	11.35
8Y254-81S17SM-□□D	8Y254-81S17SD-□□D				Dual	
8Y254-101S21SM-□□S	8Y254-101S21SD-□□S	10.1	1.6	2.1	Single	13.35
8Y254-101S21SM-□□D	8Y254-101S21SD-□□D				Dual	
8Y254-113S28SM-□□S*	8Y254-113S28SD-□□S*	11.3	1.8	2.4	Single	14.55
8Y254-113S28SM-□□D*	8Y254-113S28SD-□□D*				Dual	
8Y254-120S28SM-□□S	8Y254-120S28SD-□□S	12.0	2.0	2.8	Single	15.25
8Y254-120S28SM-□□D	8Y254-120S28SD-□□D				Dual	

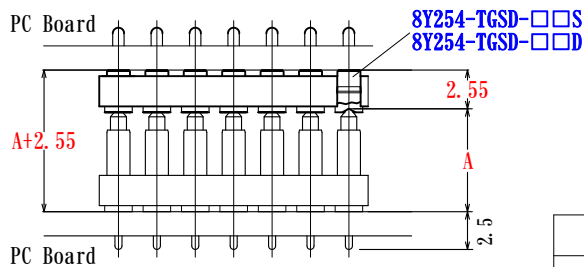

SD: The distance between the substrates in the case of SD type

:mm

Spring Probe Connectors		Initial height	S	Full Travel	Line	A+2.55
SMT type P/N	Solder Dip type P/N					
8Y254-53S10SM-□□S	8Y254-53S10SD-□□S	5.3	0.7	1.0	Single	7.85
8Y254-53S10SM-□□D	8Y254-53S10SD-□□D				Dual	
8Y254-64S14SM-□□S	8Y254-64S14SD-□□S	6.4	1.0	1.3	Single	8.95
8Y254-64S14SM-□□D	8Y254-64S14SD-□□D				Dual	
8Y254-74S14SM-□□S	8Y254-74S14SD-□□S	7.4	1.0	1.4	Single	9.95
8Y254-74S14SM-□□D	8Y254-74S14SD-□□D				Dual	
8Y254-81S17SM-□□S	8Y254-81S17SD-□□S	8.1	1.1	1.7	Single	10.65
8Y254-81S17SM-□□D	8Y254-81S17SD-□□D				Dual	
8Y254-101S21SM-□□S	8Y254-101S21SD-□□S	10.1	1.6	2.1	Single	12.65
8Y254-101S21SM-□□D	8Y254-101S21SD-□□D				Dual	
8Y254-113S28SM-□□S*	8Y254-113S28SD-□□S*	11.3	1.8	2.4	Single	13.85
8Y254-113S28SM-□□D*	8Y254-113S28SD-□□D*				Dual	
8Y254-120S28SM-□□S	8Y254-120S28SD-□□S	12.0	2.0	2.8	Single	14.55
8Y254-120S28SM-□□D	8Y254-120S28SD-□□D				Dual	

* mark product is made only upon order.


8Y254B Series Spring Probe Pins

Specifications


Contact resistance	: 50mΩmax *
Durability	: 100,000 cycles min
Operating temperature	: -45°C~+150°C

Materials

Barrel	: Brass, Au, over Ni
Plunger	: Brass, Au plating over Ni over Ni plating
Spring Coil	: Stainless steel, Au plating

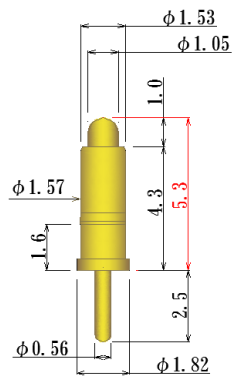


8Y254B-H53S10-SD




8Y254B-H53S10-SM

Full travel 1.0mm
0.98N (100gf) at 0.7mm travel
(recommended travel)

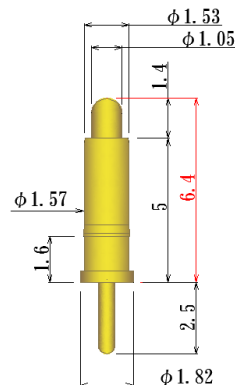


8Y254B-H64S14-SD



8Y254B-H64S14-SM


Full travel 1.3mm
0.98N (100gf) at 1.0mm travel
(recommended travel)

8Y254B-H120S28-SM (Page 5A9)
Temperature Rise (Reference)

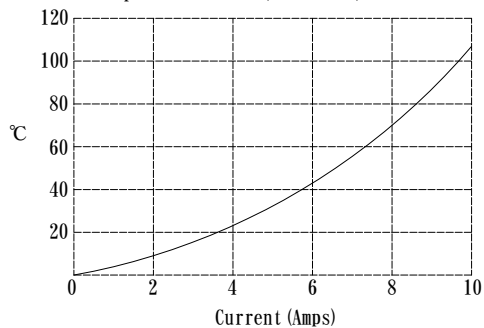


*In case of Gold plated PC board land or Gold plated metal for the mating surface.
*At recommended stroke and Static contacting to the target. (The target shall be motionless.)

8Y254B Series Spring Probe Pins

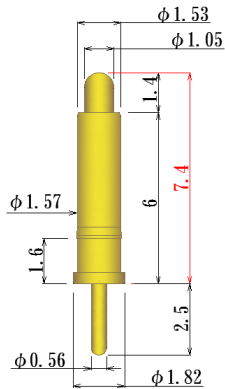


8Y254B-H74S14-SD

Full travel 1.4mm
0.98N (100gf) at 1.0mm travel (recommended travel)




8Y254B-H74S14-SM

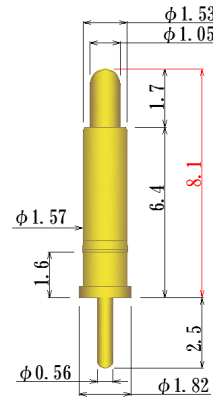


8Y254B-H81S17-SD

Full travel 1.7mm
0.98N (100gf) at 1.1mm travel (recommended travel)

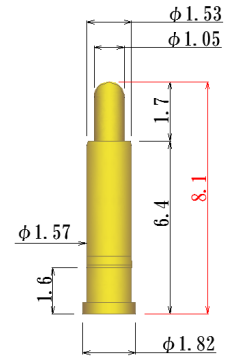


8Y254B-H81S17-SM

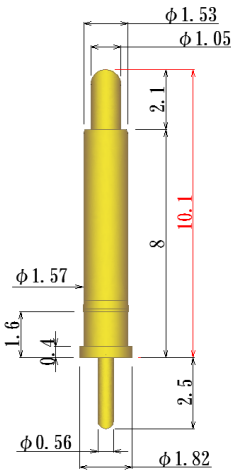


8Y254B-H101S21-SD

Full travel 2.1mm
0.98N (100gf) at 1.6mm travel (recommended travel)

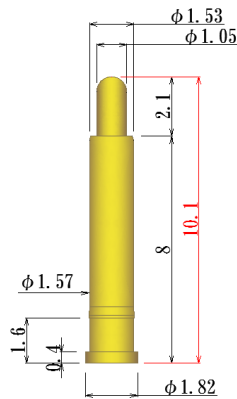


8Y254B-H101S21-SM

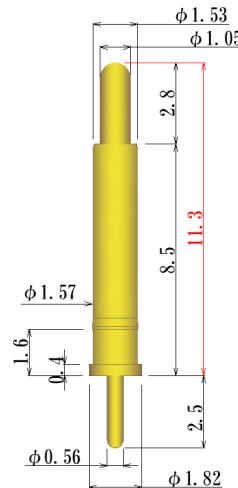


8Y254B-H113S28-SD*

Full travel 2.4mm
0.98N (100gf) at 1.8mm travel (recommended travel)

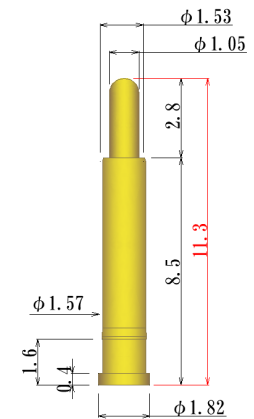


8Y254B-H113S28-SM*

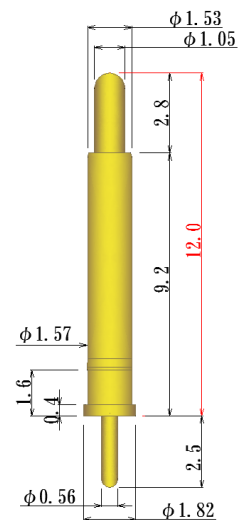

8Y254B-H120S28-SD

Full travel 2.8mm
0.98N (100gf) at 2.0mm travel (recommended travel)

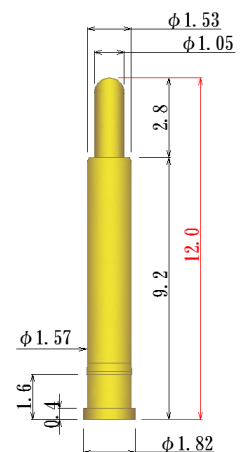

8Y254B-H120S28-SM

* mark product is made only upon order.