



Acceptable Plug  $\phi 0.64 \sim \phi 0.38\text{mm}$  , Socket Pins



Parts Number	Length L	Length L2	Depth d	Hight H	$\phi f$	mm
NZG8809-GG	8.8	5.0	3.4	3.8	0.4	
NZG88094-GG	9.4	3.4	5.3	6.0	0.51	
NZG8810-GG	10.2	6.2	3.5	4.0		
NZG8811-GG	10.6	6.8	3.4	3.8		
NZG8820-GG	20.0	13.0	6.0	7.0	0.46	


(N88)

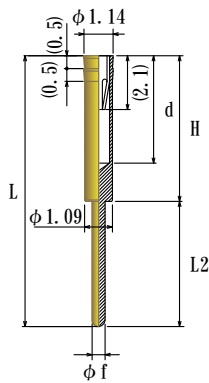

Parts Number	Length L	Length L2	Depth d	Hight H	$\phi f$	mm
NZG88106-GG	10.6	4.9	4.2	5.7	0.51	
NZG88106-GG-H	10.6	4.9	4.2	5.7		Note) 1
NZG88117-GG	11.7	4.0	4.2	7.7		
NZG88137-GG	13.7	5.7	6.5	8.0	0.46	
NZG8816-GG	16.0	8.0	6.5	8.0		


Note) 1 Non magnetic type

(N88)




N88F1315L74


How to use




(N88)

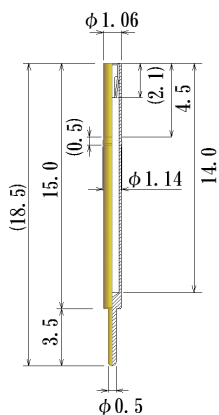

N88R150L185A-GG



N88R-L125-GG

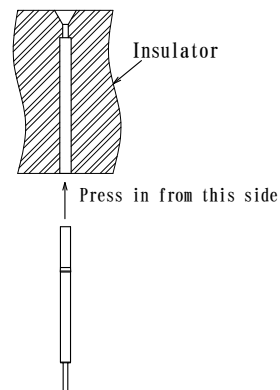

(N88)